



INDIVIDUAL TYPE 獨立式


RECESS W/ DUMMY 暗裝配分間板

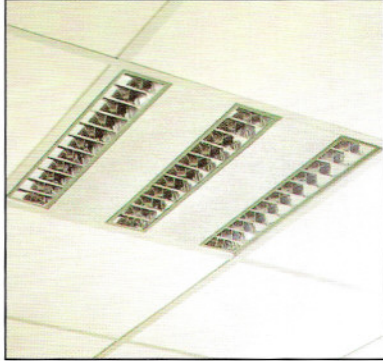

SURFACE W/ DUMMY 明裝配分間板

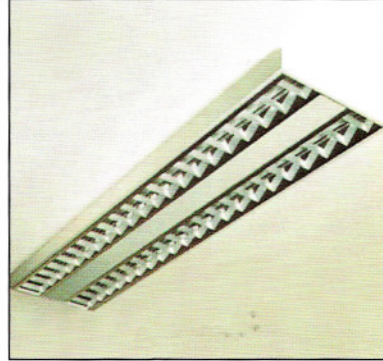


PENDANT W/O DUMMY 吊掛(無分間板)

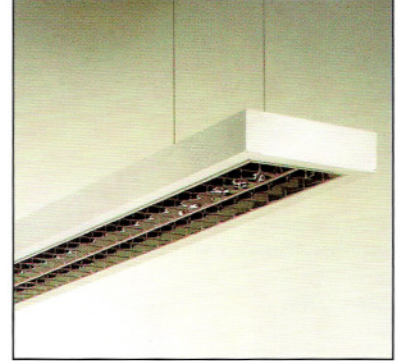


CONTINUOUS TYPE 連續式

RECESSED MOUNTED 暗裝

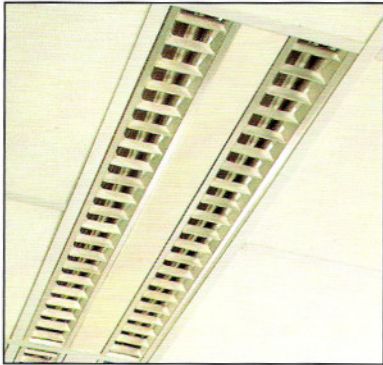

SURFACE / PENDANT MOUNTED 明裝/吊掛

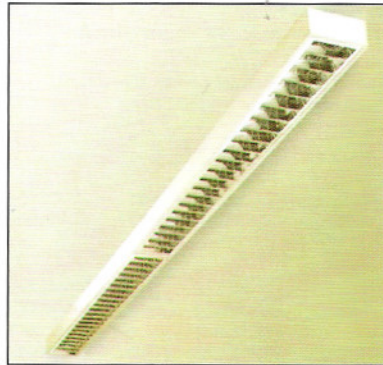


DIRECT & INDIRECT PENDANT MOUNTED(+U)
上下照射吊掛




P.8

DIMENSION 尺寸


RECESS W/ DUMMY 暗裝配分間板
AIII-0120

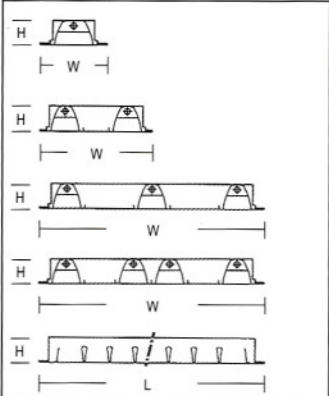


RECESS W/O DUMMY 暗裝
AIII-0130

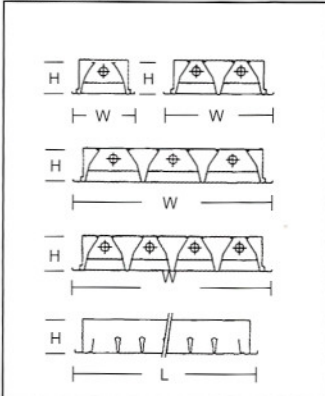

SURFACE W/ DUMMY 明裝配分間板
AIII-0120+S

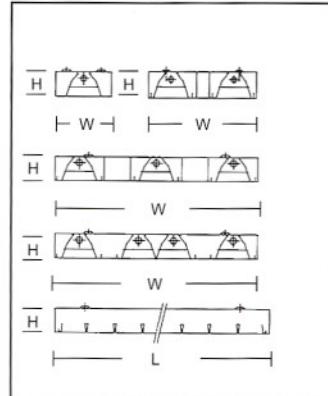


SURFACE W/O DUMMY 明裝
AIII-0130+S

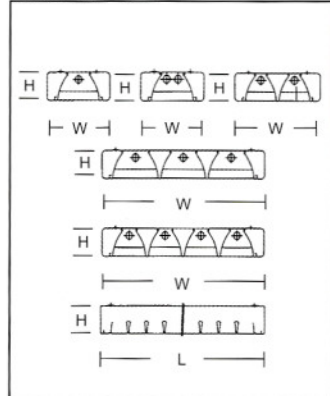


PHOTOMETRIC DATA 配光曲線圖


DIRECT SPECULAR SINGLE(+SS)
2x36w T8




DIRECT MATT SATIN DOUBLE(+MD)
2x36w T8



DIRECT: SPECULAR SINGLE(+SS)
INDIRECT: PRISMATIC DIFFUSER(+UP)
1x36w T8



DIRECT: MATT SATIN SINGLE(+MS)
INDIRECT: OPAL DIFFUSER(+UO)
2x28w T5



APPLICATIONS

OFFICES . COMPUTER ROOMS . MEETING ROOMS . LIBRARIES . HALLWAYS .
EXHIBITION HALLS . RECEPTION AREAS

STRUCTURE

BODY: SHEET STEEL IN STANDARD WHITE POWDER COATED COLOR.

DUMMY PANEL: SOLID SHEET STEEL IN STANDARD WHITE COLOR AS STANDARD, OTHERS ARE ALUMINIUM IN MICRO-PERFORATED ALUMINIUM IN STANDARD WHITE COLOR(+DWP) / MICRO-PERFORATED SPECULAR ANODIZED ALUMINIUM(+DSP) / MICRO-PERFORATED MATT-SATIN ANODIZED ALUMINIUM(+DMP) / SOLID SPECULAR ANODIZED ALUMINIUM(+DS) / SOLID MATT-SATIN ANODIZED ALUMINIUM(+DM) / OPAL DIFFUSER(+O) / PRISMATIC DIFFUSER(+P) / OTHER COMBINATION.

UPPER DIFFUSER: PRISMATIC DIFFUSER AS STANDARD, OPAL DIFFUSER(+UP) / CLEAR DIFFUSER(+UC) ARE AVAILABLE.

LOUVER: PARABOLIC ANODIZED ALUMINIUM IN SPECULAR-SINGLE(+SS) / SPECULAR-DOUBLE(+SD) / MATT SATIN-SINGLE(+MS) / MATT SATIN-DOUBLE(+MD) / WHITE PREPAINTED-SINGLE(+WS) / WHITE PREPAINTED-DOUBLE(+WD).

CONTROL GEAR: STANDARD IN 220V 50HZ SWITCHSTART(LPF), OTHERS ARE AVAILABLE IN SWITCHSTART HPF(+C) / HF ELECTRONIC BALLAST(+H) / DIMMABLE HF ELECTRONIC BALLAST(+DH).

EMERGENCY: STANDARD 2 HOURS DISCHARGE NI-CD BATTERY(+EM2), OTHERS ARE AVAILABLE IN 3 HOURS DISCHARGE NI-CD BATTERY(+EM3) / 2 HOURS DISCHARGE NI-MH BATTERY(+EMH2).

OPTIONS: FUSED TERMINAL BLOCK(+F),

ORDER CODE 訂購編碼

Cat. No. 型號	Lamp 光源	Dimension 尺寸 (WxLxHmm)
AIII-0120-114/124 T5	1x14w/21w T5	T5光管G5 200/300x600x65
AIII-0120-121/139 T5	1x21w/39w T5	T5光管G5 200/300x900x65
AIII-0120-128/154 T5	1x28w/54w T5	T5光管G5 200/300x1200x65
AIII-0120-135/149/180 T5	1x35w/49w/80w T5	T5光管G5 200/300x1500x65
AIII-0120-214/224 T5	2x14w/24w T5	T5光管G5 300/600x600x65
AIII-0120-221/239 T5	2x21w/39w T5	T5光管G5 300/600x900x65
AIII-0120-228/254 T5	2x28w/54w T5	T5光管G5 300/600x1200x65
AIII-0120-235/249/280 T5	2x35w/49w/80w T5	T5光管G5 300/600x1500x65
AIII-0120-314/324 T5	3x14w/24w T5	T5光管G5 600x600x65
AIII-0120-321/339 T5	3x21w/39w T5	T5光管G5 600x900x65
AIII-0120-328/354 T5	3x28w/54w T5	T5光管G5 600x1200x65
AIII-0120-335/349/380 T5	3x35w/49w/80w T5	T5光管G5 600x1500x65
AIII-0120-414/424 T5	4x14w/24w T5	T5光管G5 600x600x65
AIII-0120-421/439 T5	4x21w/39w T5	T5光管G5 600x900x65
AIII-0120-428/454 T5	4x28w/54w T5	T5光管G5 600x1200x65
AIII-0120-435/449/480 T5	4x35w/749w/80w T5	T5光管G5 600x1500x65
AIII-0130-114/124 T5	1x14w/21w T5	T5光管G5 120x600x100
AIII-0130-121/139 T5	1x21w/39w T5	T5光管G5 120x900x100
AIII-0130-128/154 T5	1x28w/54w T5	T5光管G5 120x1200x100
AIII-0130-135/149/180 T5	1x35w/49w/80w T5	T5光管G5 120x1500x100
AIII-0130-214/224 T5	2x14w/24w T5	T5光管G5 200x600x100
AIII-0130-221/239 T5	2x21w/39w T5	T5光管G5 200x900x100
AIII-0130-228/254 T5	2x28w/54w T5	T5光管G5 200x1200x100
AIII-0130-235/249/280 T5	2x35w/49w/80w T5	T5光管G5 200x1500x100
AIII-0130-314/324 T5	3x14w/24w T5	T5光管G5 280x600x100
AIII-0130-321/339 T5	3x21w/39w T5	T5光管G5 280x900x100
AIII-0130-328/354 T5	3x28w/54w T5	T5光管G5 280x1200x100
AIII-0130-335/349/380 T5	3x35w/49w/80w T5	T5光管G5 280x1500x100
AIII-0130-414/424 T5	4x14w/24w T5	T5光管G5 360x600x100
AIII-0130-421/439 T5	4x21w/39w T5	T5光管G5 360x900x100
AIII-0130-428/454 T5	4x28w/54w T5	T5光管G5 360x1200x100
AIII-0130-435/449/480 T5	4x35w/749w/80w T5	T5光管G5 360x1500x100

應用位置

寫字樓 · 電腦室 · 會議室 · 圖書館 · 通道 ·
展覽館 · 接待室

結構

燈體 : 白色粉末噴塑金屬外殼。
分間板 : 分間可配平板式微孔, 顏色可噴白或鏡面或啞面。
向上面罩 : 向上照射膠片可配棱形、奶白或透明。
百葉 : 拋物線德國氧化鋁格珊罩。
電器 : 全進口電器(電感式、電子式、調光暗電子式)。
應急 : 可配2小時或3小時應急電池套件。
配件 : 可另配保險絲及座。