



### STANDARD 標準

OPEN TYPE 開放式

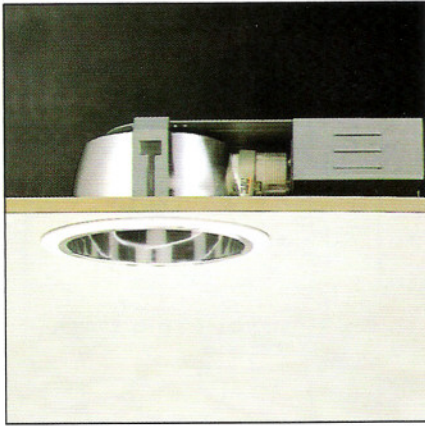

### OPTIONS 其他配套


CROSS LOUVER (+CL)  
十字交錯百葉




TURBO LOUVER (+TL)  
渦輪百葉




FLOATING GLASS (+FG)  
沿浮玻璃




INTERNAL GLASS IP44 (+IG)  
內置防塵玻璃




### DIMENSION 尺寸




### PHOTOMETRIC DATA 配光曲線圖




CAT.No KI-460-218  
OPEN TYPE 2x18w PLC  
開放式



CAT.No. KI-480-226+CL  
CROSS LOUVER 2x26w PLC  
十字交錯百葉



CAT.No. KI-460-213+FG  
FLOATING GLASS 2x13w PLC  
沿浮玻璃



CAT.No. KI-460-118+IG  
INTERNAL GLASS 1x18w PLC  
固定防塵玻璃

P.10

### APPLICATIONS

LOBBIES . HALLWAYS . LIBRARIES . LIGHTINGS OF SHOPS .  
SUPERMARKETS . RESTAURANTS . OFFICES .

### STRUCTURE

- TRIM:** SHEET STEEL IN STANDARD WHITE COLOR, DIE-CAST ALUMINIUM & OTHER COLORS ARE AVAILABLE IN BLACK(+B) / SILVER(+S) / GREY(+G) / OTHERS.
- HOUSING:** SHEET STEEL IN NATURAL / WHITE COLOR.
- REFLECTOR / LOUVER:** ANODIZED ALUMINIUM IN STANDARD SPECULAR SILVER, OTHERS ARE AVAILABLE IN DIAMOND FACETED SILVER(+DF) / SATIN SILVER(+SS) / GOLD(+G) / VACUUM DARKLIGHT (DL).
- DIFFUSER:** FROSTED TEMPERED GLASS IN STANDARD OTHERS ARE AVAILABLE IN CLEAR(+C) / SEMI-FROSTED(+SF) / DOT PATTERN(+D) / PRISMATIC(+P).
- CONTROL GEAR:** STANDARD IN 220V 50HZ SWITCHSTARTS OTHERS ARE AVAILABLE IN SWITCHSTART HPF(+C) / HF ELECTRONIC BALLAST(+H) / DIMMABLE HF ELECTRONIC BALLAST(+DH).
- EMERGENCY:** REMOTE STANDARD 2 HOURS DISCHARGE NI-CD BATTERY(+REM2), OTHER ARE AVAILABLE IN 3 HOURS DISCHARGE NI-CD BATTERY(+REM3) / 2 HOURS DISCHARGE NI-MH BATTERY(+REM2) / 3 HOURS DISCHARGE NI-MH BATTERY(+REM3).

### 應用位置

大堂 · 走道 · 圖書館 · 商鋪 · 超級市場 · 餐廳 · 寫字樓 ·

### 結構

- 燈體** : 白色金屬或鑄鋁外殼;  
可選擇黑、銀、灰或其他顏色。
- 外圈** : 金屬或白色。
- 反光罩** : 標準鋁電鍍鏡面;  
/百葉 可選擇鑽石琢面、沙銀或金色。
- 面罩** : 標準強化霧面玻璃; 可選擇透明/半霧面/網紋。
- 電器** : 全進口電器 (電感/電子/調光電子鎮流器)。
- 應急** : 可配分體 2 小時或 3 小時應急電池套件。

### ORDER CODE 訂購編碼

Cat. No. 型號	Lamp 光源	燈泡	Dimension 尺寸 (ODxHmm)	Opening 開口 (∅mm)
KI-445-GLS	Max. 60w E27	燈泡 E27	137x105	123
KI-445-110/113	1x10w/13w PLC	節能管 G24d-1	137x105	123
KI-445-210	2x10w PLC	節能管 G24d-1	137x105	123
KI-452-GLS	Max. 100w E27	燈泡 E27	170x110	135
KI-452-110/113	1x10w/13w PLC	節能管 G24d-1	170x110	135
KI-452-210/213	2x10w/13w PLC	節能管 G24d-1	170x110	135
KI-460-GLS	Max. 150w E27	燈泡 E27	195x90/115/125	175
KI-460-113/118/126/132	1x13w/18w/26w PLC, 1x32w PLT	節能管 G24d-1/2/3, GX24q-3	195x90/115/125	175
KI-460-207/209/213/218/226	2x7w/9w PL, 2x13/18w/26w PLC	節能管 G23, G24d-2/3	195x90/115/125	175
KI-470-GLS	Max. 150w E27	燈泡 E27	210x125	190
KI-470-113/118/126/132	1x13w/18w/26w PLC, 1x32w PLT	節能管 G24d-1/2/3, GX24q-3	210x125	190
KI-470-213/218/226	2x13w/18w/26w PLC	節能管 G24d-1/2/3	210x125	190
KI-480-GLS	Max. 250w E27	燈泡 E27	240x105/125/150	215
KI-480-113/118/126/132	1x13w/18w/26w PLC	節能管 G24d-1/2/3	240x105/125/150	215
KI-480-213/218/226/232	2x13w/18w/26w PLC, 2x32w PLT	節能管 G24d-1/2/3, GX24q-3	240x105/125/150	215
KI-480-70/150	1x70w/150w HIT-DE	高壓金鹵 RX7s	240x105/125/150	215
KI-490-118/126/132/142	1x18w/26w PLC, 1x32w/42w PLT	節能管 G24d-2/3, GX24q-3/4	267x145/160/152	240
KI-490-213/218/226/232/242	2x13w/18w/26w PLC, 2x32w/42w PLT	節能管 G24d-2/3, GX24q-3/4	267x145/160/152	240
KI-490-70/150/250	1x70w/150w/250w HIT-DE	高壓金鹵 RX7s	267x145/160/152	240