



STANDARD 標準


KVIII-7300

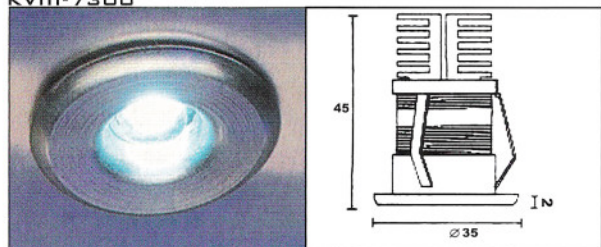


KVIII-7301

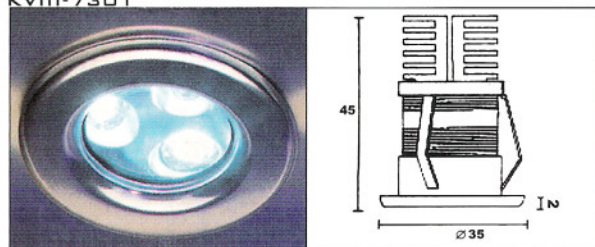





KVIII-7302

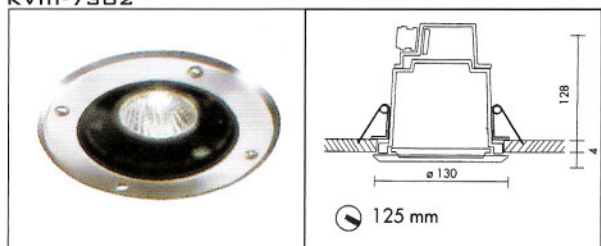

KVIII-7303

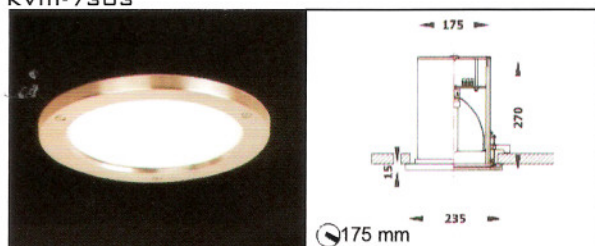

PHOTOMETRIC DATA 配光曲線圖



P.17

APPLICATIONS

CANOPY . CORRIDORS . OUTDOOR HALLWAYS . BUILDING ENTRANCE HALLS

應用位置

屋蓋 · 走道 · 戶外通道 · 大廈入口大堂

STRUCTURE

ANODIZED ALUMINIUM FINISHED BODY FOR KVIII-7300/7301,
CORROSION RESISTANT DIE-CAST ALUMINIUM OR STAINLESS STEEL FRONT RING FOR KVIII-7302/7303.

CLEAR / SAND BLASTED TEMPERED GLASS.

STAINLESS STEEL SCREWS.

ANODIZED SAND BLASTED ALUMINIUM REFLECTOR.

WEATHER PROOF SILICONE GASKET.

INTEGRAL CONTROL GEAR FOR KVIII-7303 &

REMOTE CONTROL GEAR FOR KVIII-7302.

結構

氧化鋁處理燈體（只適用於KVIII-7300/7301）；

防腐蝕鑄鋁或不銹鋼面蓋（只適用於KVIII-7302/7303）。

透明或磨砂強化玻璃。

不銹鋼螺絲。

銀色氧化鋁反射罩（只適用於KVIII-7303）。

防水密封條。

全進口電器。

外殼顏色：黑 / 深灰 / 銀 / 白。

AVAILABLE COLOR: BLACK(+B) / DARK GREY(+DG) / SILVER(+S) / WHITE(+W).

ORDER CODE 訂購編碼

Cat. No. 型號	Lamp 光源
KVIII-7300-LED	1x1w LED (WHITE / BLUE / YELLOW / RED / GREEN)
KVIII-7301-3LED	3x1w LED (WHITE / BLUE / YELLOW / RED / GREEN)
KVIII-7302-DIR	1x35w/50w 12V 石英膽 Gu5.3
KVIII-7303-18/26 PLC	1x18w/26w PLC 節能管 G24d-2/3
KVIII-7303-32/42 PLT	1x32w/42w PLT 節能管 Gx24q-3/4
KVIII-7303-35/70 HIT	1x35w/70w HIT 高壓金鹵 G12
KVIII-7303-70 HIE	1x70w HIE 高壓金鹵 E27
KVIII-7303-70 HSE	1x70w HSE 高壓鈉氣 E27
KVIII-7303-80 HME	1x80w HME 高壓水銀 E27
KVIII-7303-GLS	1x100w GLS/PAR 燈泡 E27