




SQUARE TYPE 方形

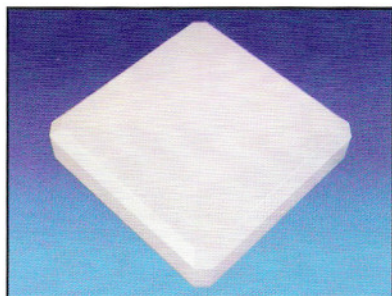

DIMENSION 尺寸

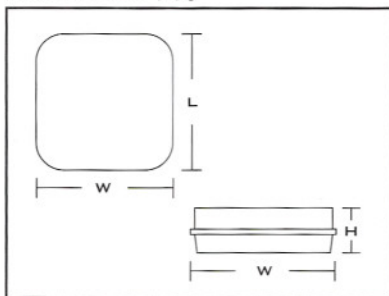

PHOTOMETRIC DATA 配光曲線圖

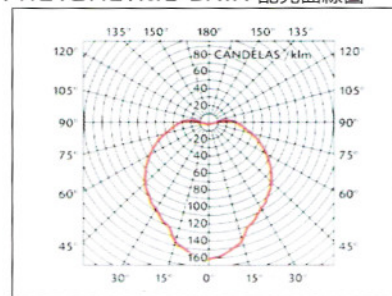


2D 28w


ROUND TYPE 圓形



DIMENSION 尺寸

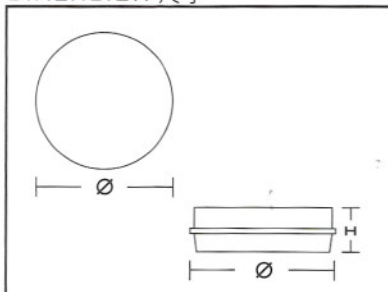

PHOTOMETRIC DATA 配光曲線圖

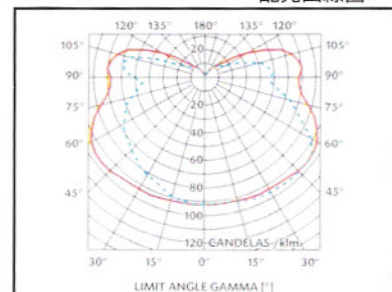

70w HSE

P.32

APPLICATIONS

CANOPIES . HALLWAYS . CORRIDORS . UNDERGROUND PASSAGEWAYS

STRUCTURE

- BODY:** SHEET STEEL IN WHITE COLOR AS STANDARD, BLACK(+B) / GREY(+G) / SILVER(+S) ON REQUEST.
- DIFFUSER:** OPAL ACRYLIC AS STANDARD.
- CONTROL GEAR:** STANDARD IN 220V 50HZ SWITCHSTART(LPFP), HPFP(+C) / HF ELECTRONIC BALLAST(+H) / DIMMABLE HF ELECTRONIC BALLAST(+DH) ON REQUEST.
- EMERGENCY:** STANDARD 2 HOURS DISCHARGE NI-CD BATTERY(+EM2) / 3 HOURS NI-CD(+EM3) / 2 HOURS NI-MH(+EMH2) / 3 HOURS DISCHARGE NI-MH(+EMH3) ON REQUEST.

應用位置

樓蓋 · 通道 · 走道 · 地下行人路

結構

- 燈體 : 白色噴塑金屬外殼。
- 面罩 : 奶白亞加力面罩。
- 電器 : 全進口電器(電感式、電子式、調光暗電子式)。
- 應急 : 可內置2小時應急電池套件。

ORDER CODE 訂購編碼

Square Type Cat. No. 方形型號	Lamp 光源		Dimension 尺寸 (WxLxHmm)
PIII-3560-22/32 C	22w/32w CIRCULAR	環形管 G10q	300x300x100
PIII-3560-28/38 2D	28w/38w 2D	蝴蝶管 GR8	300x300x100
PIII-3560-213/218 PLC	2x13w/18w PLC	節能管 G24d-1/2	300x300x100
PIII-3560-211 PL	2x11w PL	節能管 G23	300x300x100
PIII-3570-32 C	32w CIRCULAR	環形管 G10q	400x400x120
PIII-3570-38 2D	38w 2D	蝴蝶管 GR8	400x400x120
PIII-3570-218 PLC	2x18w PLC	節能管 G24d-2	400x400x120
Round Type Cat. No. 圓形型號	Lamp 光源		Dimension 尺寸 (Øx Hmm)
PIII-3503-40 C	40w CIRCULAR	環形管 G10q	490x140
PIII-3503-38 2D	38w 2D	蝴蝶管 GR8	490x140
PIII-3503-32+40 C	32w + 40w CIRCULAR	環形管 G10q	490x140
PIII-3509-32C	32w CIRCULAR	環形管 G10q	340x100
PIII-3509-16/21/28/38 2D	16w/21w/28w/38w 2D	蝴蝶管 GR8	340x100
PIII-3509-22+32 C	22w+32w CIRCULAR	環形管 G10q	340x100
PIII-3509-218/226 PLC	2x18w/26w PLC	節能管 G24d-2/3	340x100
PIII-3507-16/21/28/38 2D	16w/21w/28w/38w 2D	蝴蝶管 GR8	250x80
PIII-3507-218/226	2x18w/26w PLC	節能管 G24d-2/3	250x80