



#### INDIVIDUAL TYPE 獨立式




#### CONTINUOUS TYPE 連續式

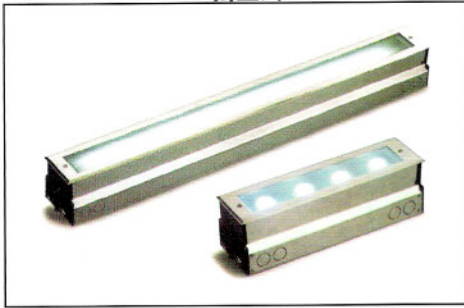

#### DIMENSION 尺寸

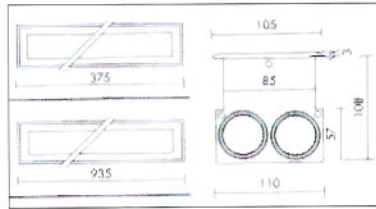

#### MOUNTINGS 裝嵌

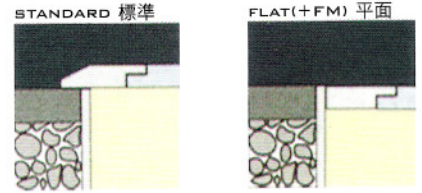

#### APPLICATIONS

HIGHLIGHTS OF BUILDINGS . LANDSCAPED AREAS .  
PATHWAYS . SCULPTURE . ARCHITECTURES

#### STRUCTURE

**BODY :** DIE-CAST ALUMINIUM IN NATURAL COLOR.  
**FRAME :** SATIN FINISHED STAINLESS STEEL (AISI 316) 3MM THICK.  
**DIFFUSER :** FROSTED TEMPERED GLASS 10MM THICK.  
**CONTROL GEAR :** BUILT-IN STANDARD BALLAST FOR LED /  
ELECTRONIC BALLAST FOR T5 LAMP.  
**PROTECTION :** STAINLESS STEEL SCREWS & SILICON RUBBER  
GASKET AS STANDARD.  
**LOADING :** 500KG & 12 JOULE.

#### 應用位置




外牆標誌 · 庭園 · 行人道 · 建築物 ·

#### 結構

燈體 : 注鋁外殼。  
面框 : 不銹鋼3mm厚。  
面罩 : 強化玻璃10mm厚。  
電器 : 全進口電器。  
保護 : 不銹鋼螺絲及密封膠條。  
重壓 : 500公斤及12焦耳。




#### ORDER CODE 訂購編碼

P.44

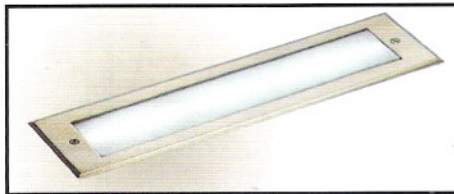




FOR LED FIXED OPTIC (COLOR : WHITE+W, BLUE+B, GREEN+G, YELLOW+Y, RED+R)

Cat. No. 型號	Lamp 光源	Dimension 尺寸 (WxLxHmm)	Beam Width 光角度	"T"°C 表面溫度
SI-8900	15 LED 1.5w	105x375x108	110°	32°
SI-8910	30 LED 3.0w	105x375x108	110°	35°
SI-8920	60 LED 6.0w	105x935x108	110°	38°
SI-8930	120 LED 12w	105x935x108	110°	42°



FOR LED TITLING REFLECTOR (COLOR : WHITE+W, BLUE+B, GREEN+G, YELLOW+Y, RED+R)

Cat. No. 型號	Lamp 光源	Dimension 尺寸 (WxLxHmm)	Beam Width 光角度	"T"°C 表面溫度
SI-8940	4 LED 4w	105x375x108	45°	35°
SI-8950	11 LED 11w	105x935x108	45°	35°



FOR T5 SYMMETRIC (+S) / ASYMMETRIC (+AS) REFLECTOR

Cat. No. 型號	Lamp 光源	Dimension 尺寸 (WxLxHmm)	Beam Width 光角度	"T"°C 表面溫度
SI-8985+S	8w T5	105x375x108	45°	45°
SI-8995+S	21w T5	105x935x108	45°	45°
SI-8965+A	8w T5	105x375x108	45°	45°
SI-8975+A	21w T5	105x935x108	45°	45°